


REQ'D: EXISTING ASPHALT TO BE RESURFACED (MIN 1.5" THICK)

REQ'D: 5" COMPACTED CRUSHED LIMESTONE BASE WITH ASPHALT WEARING SURFACE (MIN 1.5" THICK)

NOTES:

- 1) ADDITIONAL LEVELING ASPHALT MAY BE REQUIRED ON TOP OF THE EXISTING ASPHALT TO PROPERLY GRADE (SEE GRADE TO DRAIN NOTES BELOW) AND/OR REPAIR EXISTING LOW SPOTS
- 2) THE SITE SHALL BE GRADED AS NECESSARY TO DIRECT WATER AWAY FROM BUILDING ON ALL SIDES.

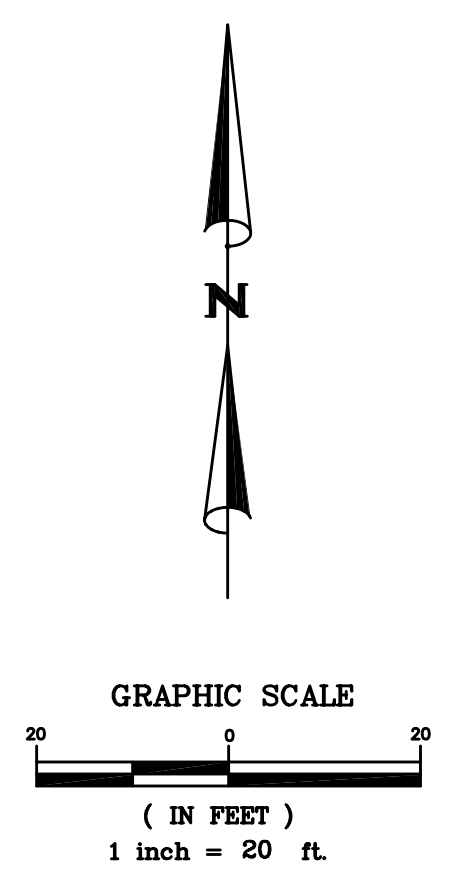

MOBILE BAY

NO.	DATE	REVISIONS
1	10/19/07	REVISED MECHANICAL YARD
2	10/19/07	REVISED RETAINING WALL
3	08/02/07	ADDED T.O.W. ELEVATIONS

CONSULTANT

HOLMES & HOLMES, ARCHITECTS
 257 NORTH CONCEPTION STREET
 MOBILE, ALABAMA

PROJECT
 A NEW FACILITY FOR THE
 FAIRHOPE YACHT CLUB
 101 VOLANTA AVENUE
 FAIRHOPE, ALABAMA

PAVING AND GRADING PLAN

DATE: FEBRUARY 2007

C-3

SHEET NO. 3 OF 11

ALTERNATE #1:
 NEW DRIVE TO BE PAVED WITH
 OCTABRICK PERMEABLE PAVING
 STONES. TO BE INSTALLED PER
 MANUFACTURER'S RECOMMENDATIONS

12"x6.5" RIBBON CURB
 REQ'D WITH ALTERNATE #1

NOTE: CUT/FILL SLOPE
 BEHIND WALL NOT
 TO EXCEED 4:1